

Technical Specification for Medical Equipment

RF NO: AF296MO-2019-495--KBL

1-Ambobag for adult, child and infant:



Ambu bag Consists of:-

- Silicone self-inflating resuscitation bag Rendell-Becker transparent face mask
Oxygen reservoir with detachable valve Removable POP valve
- International size & standard Oxygen Tube 2 Meter Carry Case
- in Infant, Child & Adult sizes .Rendell-Becker transparent face mask
Oxygen reservoir with detachable valve Removable POP valve International size & standard
Oxygen Tube 2 Meter Carry Case in Infant, Child & Adult sizes

02-APRON, SURGICAL, 90X140 M, REUSABLE, PVC:



Specifications

Materials: SURGICAL APRON, RUBBER, heavy-duty
Nitrile rubber
Color: White

- Straight apron with bib.
- Back fastening and adjustable neck strap.
- Standard adult size: length ±120-150cm, width 90cm.
- High resistance to fat, acid and heat.

Materials: SURGICAL APRON, PVC
White, light-blue or clear PVC.

- Straight apron with bib.
- String: 2 sides.
- Neck strap.
- Standard adult size: length ±120cm, width 70- 90cm.

Materials for both apron types must support disinfection with a 0.5% active chlorine solution.

03-Auto clove Medium size (25 liters)



Technical specification:

Materials:	Lid, chamber, bottom grid: stainless steel
	Gasket: silicone.
Specifications:	An autoclave is a strong container used for high-pressure steam sterilization.
	Manually-operated 25-litre double-chamber vertical or horizontal autoclave, designed to function on 2 different types of energy sources (gas and electricity) and no running water. The energy sources can be used separately or in combination, according to the power supply situation.
	- Power supply:

	Electricity 220-380V
	gas
	- Container:
	Volume: 25 liters
	Internal chamber size: standard size according to capacity mentioned above
	Valves: different color-coded gates, to facilitate procedures
	Steam exchanger: regulating valve with a counterweight of a 1.2 bar or 2.2 bar
	Drying system: surface condensation (condenses exhaust steam through contact with cold metallic surfaces - oil)
	It can run an autoclave without running water.
	Lid: manual locking system.
	Delivered with service and operator's manual: English.
Packaging:	Unit presentation: Each autoclave is delivered with the following items:
	- 2 stainless steel sterilization baskets
	- 1 GASKET, for cover type OPA,
	- 1 HEATING ELEMENT
	- 2 DRUM, STERILIZING according to capacity mentioned above
	- 2 DRUM, STERILIZING, according to its capacity, lateral ellipse
	- User and maintenance manual: English
	Serial number should be written on the outside packaging.
	Packed in a solid wooden case, waterproof.
Other:	Always mention the autoclave's serial number when ordering spare parts.

04-Obstructed labor set:

Kit contents:

1 x S0791500 - Vacuum extractor, Bird, manual, complete .set

10 x S0481053 - Thermometer, clinical, digital, 32-43°C

1 x S9910000 - Surg. inst., abdominal /SET:

Set contents:

4 x S0712200 - Clamp, towel, Backhaus, 130mm

1 x S0724000 - Forceps, artery, Kelly, 140mm, cvd

2 x S0726000 – Forceps, artery, Kocher, 140mm, str

2 x S0728000 - Forceps, artery, Pean/Roch, 200mm,cvd
2 x S0728015 - Forceps artery, Pean/Roch,240mm,cvd
6 x S0730000 - Forceps,artery ,Halst-Mosq,125mm,cvd
1 x S0725000 - Forceps, artery, Mixer(>,<)>230mm
1 x S0721000 - Forceps, dressing, standard,155mm,str
1 x S0722200 - Forceps, dressing, standard, 250mm,str
1 x S0722500 - Forceps, dressing ,Cheron,250mm
2 x S0728670 - Forceps(>,<)>intest ,clamp(>,<)>Doyen,230mm,cvd
2 x S0741500 - Forceps,uterine,Phaneuf,215mm,cvd
1 x S0740000 - Forceps,uterine(>,<)>Duplay,280mm,cvd
2 x S0738000 - Forceps,tissue,Allis(>,<)>150mm
1 x S0736500 - Forceps,tissue,Babcock,200mm
2 x S0739100 - Forceps,tissue(>,<)>Duval(>,<)>230mm
1 x S0737000 - Forceps,tissue,standard,145mm,str
1 x S0737700 - Forceps,tissue(>,<)>standard,250mm,str
1 x S0743600 - Needle holder,Mayo-Hegar,180mm,str
1 x S0767800 - Retractor,abdo,Collin,3 blades
1 x S0767500 - Retractor,abdo,Balfour,3 blades
1 x S0768960 - Retractor,Farabeuf,d-e,180mm,pair
1 x S0745500 - Scalpel handle,no.4
1 x S0771350 - Scissors,Metzem/Nelson,180mm,cvd,b/b
1 x S0771450 - Scissors(>,<)>Metzem/Nelson,230mm,cvd(>,<)>b/b
1 x S0770600 - Scissors,Mayo,170mm,cvd,b/b
1 x S0770800 - Scissors,Mayo,230mm,cvd,b/b
2 x S0779700 - Spatula,abdo,malleable,270mm
1 x S0760800 - Tube suction(>,<)>Yankauer(>,<)>270mm
1 x S0720000 - Forceps,clip,applying/removing,Michel

1 x S0781000 - Suture clip, Michel, 3x14mm/BOX-1000

1 x S0225000 - Bowl, stainless steel, 600ml

05-scapal handle:




STAINLESS STEEL HANDLE FOR #20, #21, OR #22 BLADES

06-BRUSH, SCRUB, NYLON HANDLE, AUTOCLAVABLE:



07-Cervical Collar:

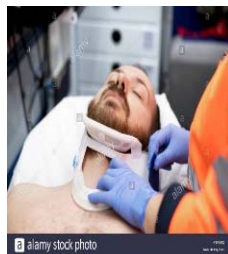

1. Measure the patient (using finger sizing method)
2. Adjust to correct size
3. Lock
4. Place on patient
5. The collar is sold in both Adult and Pediatric sizes

08- Neonatal resuscitation trolley:



Application	Clinics
Material	Stainless Steel, Mild Steel
Oxygen Cage	Yes
Load Capacity	1-5 kg
Number of Drawers	3

09-Clean delivery kit:



Emergency Obstetrical Kit in Bag includes retractable scalpel, underpadding, sponges, bulb aspirator, umbilical clamps, placenta bag and over drape.

10- Dilatation and curettage (D&C) set

Set contents:

- 1 x S0718210 - Dilators,uter,Hegar,d-e,3-4to17-18mm
- 1 x S0722500 - Forceps,dressing,Cheron,250mm
- 1 x S0742400 - Forceps,uterine,Museux,240mm,cvd
- 1 x S0768400 - Retractor,vaginal,Doyen,45x85mm
- 1 x S0779500 - Retractor,vaginal,Auward,38x80mm
- 1 x S0715300 - Scoop,uterine,Simon,12mm,sharp
- 1 x S0713000 - Curette,uterine,Sims,8mm,blunt
- 1 x S0714300 - Curette,uterine,Sims,7mm,sharp
- 1 x S0714700 - Curette,uterine,Sims,9mm,sharp
- 1 x S0715200 - Curette,uterine,Sims,12mm,sharp
- 1 x S0775200 - Sound,uterine,Martin,320mm
- 1 x S0777500 - Speculum,vaginal,Graves,95x35mm
- 1 x S0237000 - Bowl,stainless steel,180ml

11- Stand light (folding) for delivery table:



Type of lighting: LED

- Consumption (Watt): 3 x 1.4
- Life of the bulbs (hours): 50000
- Light intensity at 50 cm (lux): 35000

- Light intensity at 1 m (lux): 13000
- Colour temperature \pm 5% at 1 m (K): 4200
- Light field size at 50 cm (\varnothing mm): 140
- External diameter of the reflector (\varnothing mm): 86 Colour: white
- Norms: IEC 60601-1 Marks: CE 93/42 Weight: 5 kg
- Operating voltage: 100-240V - 50/60 Hz

12-Delivery set:



- Sponge holding forceps 25cm, 2
- Cord clamp,1
- Straight big artery forceps 20cm, 1
- Dissecting forceps tooth 15cm,1
- Dissecting forceps Non-tooth 15cm,1
- Scissor mayo's 17.5cm, 1
- Scissor cord cutting, 1
- Scissor episiotomy, 1
- Outlet forceps, 1
- Low mid cavity forceps, 1
- Ventouse cup silicon 40mm
- Ventouse cup silicon 50mm
- Ventouse cup silicon 60mm
- Cover bag, 1

13-Dispensing counting tray:



Technical specification:

Easily opens with the push of a finger and stays securely shut Includes grips on bottom to reduce sliding during use holds up to 46 aspirin sized pills.Dimensions: 8.25 x 2" x 1". Each Compartment: 1.5" x 1" x1".

14-DRESSING set:



- Mayo Scissors 14.5cm Straight TC
- Dissecting Scissors 14.5cm Sharp/Blunt Lister Bandage Scissors 15cm
- Spencer Stitch Scissors 11cmFoerster Sponge Forceps 25.5cm
- Dressing Forceps 16cmDressing Forceps 1:2 16cm
- Kelly Forceps 14cm Straight Adson Forceps 12cm
- Lotion Bowl 04 OzKidney Dish 08"
- All tools are made from high grade surgical stainless steel

15-Dressing Trolley:



- Dimensions: Size: L 76 x W 45 x H 80cms.
- Frame work made of Stainless Steel tubular pipe.
- Mounted on four 15cms castors.
- Two fixed Stainless Steel shelves.
- Three Side S.S. rails.
- Dressing Trolleys with Bowl Bucket

16-DRIP STAND:



Description

STAND, INFUSIONS,5 legs on wheels, 4 hooks.

General information

To suspend intravenous fluids. It can also be used to elevate an arm (in an arm bag).

Technical Specifications

Mobile infusion stand on 5 castors, adjustable height.

Materials:	Base, supports column and hook: 18/10 CrNi steel.
	Wheel insert: aluminum
	Wheel: rubber
	Frame: brightly polished or satin finishing.
Components:	- Base: heavy base on 5 antistatic swivel castors.
	Branches: square tube 25x25mm, 600mm width.
	Castors: Ø 50mm
	- Support column: solid mechanism to which the upper pole is fixed; the pole has an adjustable height up to 2000mm.
	Standard sleeve: diameter 30mm, height 1000mm with stainless steel locking sleeve.
	Serum rods: diameter 16mm, height 1000mm
	- Hook: 4 hooks welded together on the top of the serum rod.
Authorized load:	12kg (3kg per hook)
Unit presentation:	Knock-down presentation, delivered with clear instructions and diagrams for assembly, includes accessories and parts list, and assembly-specific tools.
Packaging:	Individually packaged in a carton 145x69x5cm.
Other:	CE mark, manufacturer's conformity certificate.

17-ENT head light:



Product description

Features: Good light spot converging Better lighting depth Big power and high intensity
ENT specific product LED: 5W Light intensity: 65000 lux Spot size: \varnothing 1-9mm(at 420mm of distance).

18-Feteoscope:



Features:

- Specially designed chest piece for pregnancy use
- Both checking the heartbeat of fetus and the heartbeat of the pregnant woman
- About 17.3 cm high, 4.7 cm outer diameter, 4 cm inner diameter, 4.3 cm outer diameter of bottom and 0.6 cm inner diameter.

19-Flash light:



Superior quality craftsmanship with weather-resistant seals and anodized inside and out for improved corrosion resistance. D batteries required (best with Polaroid D batteries)

20- Height measuring board:



Description

MEASURING BOARD, ped., hor./vert., 130cm/1mm, wood,

General information

Height must be established in order to measure statural growth and corpulence.

Required in clinics and hospitals, and to conduct nutritional surveys.

Portable infant or child measuring boards that measure height and length can be used to measure either the recumbent length of infants or the standing height of preschool-age children.

Children under 2 years of age are placed horizontally on their backs, barefoot, on an accurately graduated height board, whose 0-value extremity is fitted with a fixed perpendicular headboard. The child's head is held firmly against the headboard, the buttocks must rest fully on the table, and the legs extended by pressing on the knees. The measurement cursor lies perpendicular to the table; it is slid against the child's heels while keeping his or her feet at right angles to the legs. The cursor is held securely in place while the child is removed; the child's height (or length) is recorded to the nearest millimetre (e.g., 65.2cm).

Children above 2 years of age are measured standing, barefoot and as erect as possible, against a vertical height board or tape measure fastened to a flat surface. The back of the head, shoulder blades, buttocks and heels must connect with the board, and the legs must be fully extended. The head must be straight, the shoulders relaxed and the arms must hang naturally. A set square is lowered firmly onto the crown of the head (particular care must be taken in measuring child with thick hair); the height is recorded to the nearest millimetre (e.g., 85.6cm).

Specifications

Size, assembled:	130cm
Weight:	6kg
Graduation:	1mm
Material:	Hardwood, with a water-resistant finish, all parts must be glued and screwed down.
Comprised of:	1- Main board. 2- Extension piece: collapsible, starts at 75cm to 130cm. 3- Sliding piece to measure head or foot. 4- Shoulder strap: adjustable for carrying.

Assembling	Easily assembled and dismantled.
Packaging:	The board folds up compactly: the sliding head or foot piece located at the base of the board collapses; it is screwed on to the main board.
Other requirements:	Multilingual instruction for use: English, French and Spanish.

Sample: Design for a non-folding measuring board.

21- Patella Hammer:



Description:

- Chrome handle with triangular synthetic rubber head
- Overall length 7 1/2

22- Hearing Screening (Tuning Fork)

Hearing Screening Equipment/Tuning Fork

Tuning Fork, 512 Hz, Medical

Material: single piece of hardened steel

Purpose: test hearing impairment, nerve sensory loss, proprioception



Individual Forks



6 Fork Set

23- Kidney dish, medium (250X140X40MM), Stainless steel

KIDNEY DISH, MEDIUM, and 250X140X40MM, STAINLESS STEEL

24- Loop and lid retractor:



Description: 1. Retractor, Lid, Desmarres, 130 x 10 mm (child)

2. Retractor, Lid, Desmarres, 130 x 12 mm

3. Retractor, Lid, Desmarres, 130 x 14 mm

25-Laryngoscope set:



Laryngoscope Set includes:

1. Standard Medium handle, Length: 15cm, Weight 6.39oz.
2. Macintosh Blade 1 (Infant) Overall Length 90mm, Weight: 3.84 oz.
3. Macintosh Blade 2 (Child) Overall Length 100mm, Weight: 3.42 oz.
4. Macintosh Blade 3 (Med. Adult) Overall Length 130mm, Weight: 2.89 oz.
5. Macintosh Blade 4 (Lg. Adult) Overall Length 155mm, Weight: 2.53 oz.
6. Protective Box

26-Nasal aspirator



The Nasal Aspirator Soft Tip Nozzle with a soft and flexible silicone tip is designed-specially to keep the baby's nasal cavity clear. With a round shaped nozzle tip, it protects the baby's mucosa and gently removes your baby's excess mucus. Thus, the baby breathes easier.

27- Mask, mouth to mouth, protection for resuscitation, reusable



- Details:
- prevent direct contacting during artificial respiration
- Made of durable plastic for easy cleaning and long product life.
- Mask is easy to clean, can be repeated use; Check valve is one-time use
- Foldable and non-foldable mask design.
- High transparency for better visualization.
- Latex-free components.
- Additional accessories and customized label should be available: alcohol pad, gloves, flexible tube and etc.
- One way valve with happy efficiency filter.
- The CPR mask is designed to provide protected rescue breathing for any patient and may also be used with a resuscitators. It helps protect rescuers in an emergency situation.

28- Midwifery kit:

Contents-Equipment:

- | | <u>Description</u> |
|-----------------------------|---------------------------------|
| 1. Scissors- | (Scissors,Mayo,140mm,cvd,b/b) |
| 2. Hand scrubbing brush(1)- | (plastic, scrubbing) |
| 3. Sterile tray- | (Tray,dressing,ss,300x200x30mm) |

4. stethoscope-adult- (Stethoscope,binaural,complete)
5. stethoscope-Fetal (Stethoscope,foetal,Pinard)
6. Sphygmomanometer(1)- (Sphygmomanometer,(adult),aneroid)
7. Kidney basin(1)- (Basin,kidney,stainless steel,825ml)
8. Steel bowl(1)- (Bowl,stainless steel,600ml)

9. Infant weighing scale- (Scale,infant,springtype,5kg x 25g)
10. Forceps, artery(2)- (Forceps,artery,Kocher,140mm,str)
11. Forceps, uterine(1)- (Forceps,uterine<(>,<)>Duplay,280mm,cvd)
12. Forceps, dressing(1)- (Dressing, Cheron, 250mm)
13. Needle holder(1)- (Needle holder,Mayo-Hegar,180mm,str)
14. Speculum, vaginal(1)- (Speculum, vaginal, Graves, 75 x 20 mm)
15. Reusable, clean towels(4)- (cotton towels; 60 cmx60cm)
16. Protective apron- (Apron,protection,plastic,reusable)
17. Plastic draw sheet- (Drawsheet,plastic,90x180cm)
18. Rubber tourniquet- (Tourniquet,latex rubber,75cm)
19. Reusable sterile towels -(4) (Towel,huck,430 x 500mm)
20. Hemostats(4) (Forceps,artery,Kelly,140mm,cvd)
21. Suction pump-hand or foot operated
22. Vacuum extractor- (Vacuum extractor, Bird, manual, comple.set)

23. Uterine Dilator- (Dilators,uterine,Hegar,d-e,3-4to17-18mm)
24. Curette, Uterine (Curette, uterine,
Simms,7mm/9mm/12mm, sharp)
25. Uterine Sound (Sound,uterine,Martin,320mm)

26. Vaginal Retractor- (Retractor,vaginal,Doyen,45x85mm)
27. Ambu Bag
28. Guerdal airways (neonatal, child, adult) (Numbers: 0, 00, 1, 2, 3, 4, 5)—1 each

29- MINOR SUGERY KIT:



- Scalpel holder No.3 1
- operating scissors blunt/sharp, straight 10cm 1
- Mayo dissecting scissors blunt/blunt, curved 15cm 1
- dressing forceps, thumb, broad 10cm 1
- tissue forceps, toothed 2x3, 11.5cm 1
- Hunter splinter forceps, angled, 10.5cm 1
- forceps Halstead mosquito, straight, 12.5cm 2
- forceps Halstead mosquito, curved, 12.5cm 2
- forceps hemostatic Kelly, straight, 14cm 2
- forceps hemostatic Kelly, curved, 14cm 2
- forceps sponge holding Rampley, 25cm 1
- farabeuf retractors set of two, 28x16mm, 15cm 1
- probe double ended diameter 2mm 1
- needle holder Collier 12.5cm 1
- stainless steel box, 30cm x 8cm x 4cm 1
- add scalpels and sutures w needles 1


30-MOBILE EXAMINATION LIGHT:



Product specification:

- high power LED lighting, the bulb life is over 25000hrs.
- The spot should be even, bright and adjustable, which makes it especially suitable for local lighting such as in stomatology, etc.
- The Components of Product Lamp Holder, Brace, Power Adapter etc.
- Voltage : AC 100V~240V/50Hz Bulb Power : 7w

31-MUAC TAPE MID UPPER ARM CIRCUMFERENCE:

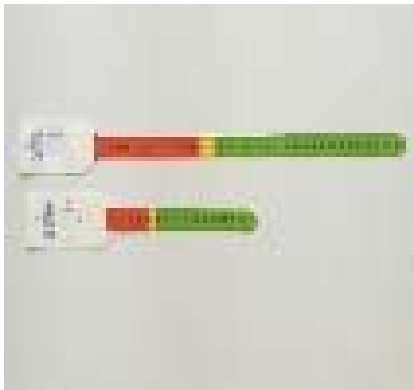

MUAC Tape Arm Tape Tapes for Measuring Mid Upper Arm Circumference

32-MVA (Manual vacuum aspiration):



Specifications:

Double valve type manually operated vacuum aspirator, comprising 60 ml calibrated barrel, plunger cum piston rod.

Ergonomic Handle. Black rubber piston, creating vacuum above 650mm/hg

Hinged, lockable double valve assembly

All Autoclavable; No. 8 Cannula Adapters size 4mm-12mm; # 1 collar stop clip with spare.

33-NEEDLE CUTTTER:



- Its makes the syringe unusable by clipping off the needle. After the clips the needle from the syringe the needle is automatically and safely retained within the clipper.
- The Syringe Needle Cutter removes insulin syringe needles and pen needles safely and easily.

34-NEEDLE HOLDER, MAYO-HEGAR, STANDARD, 18 CM:



35-Nebulizer:



Nebulizer, electric, with accessories

Portable, compressor driven nebulizer pump

Easy to operate and sturdy design for use in demanding environment

Cup capacity: min 3 ml to max 10 ml

Nebulization, approx: 0.3 to 0.8 ml/min

Residual volume: max 2 ml

Flow delivery range (under load): 0.5 to max 10 L/min

Mass median aerodynamic diameter of particles (MMAD): 0.5 to 4 μ m

Operating temperature range: +5 to +50 C

Operating relative humidity range: up to 65 %

Compressor requires no maintenance and delivers oil-free flow

Device, with carry handle, is provided with accessory storage compartment

Power supply: 220 V / 50 Hz

Power consumption, approx: 80 W

Supplied with:

1 x Nebulizer atomizer body piece (dome)
1 x Reusable mouth piece, size pediatric (fitting atomizer body piece)
1 x Reusable mouth piece, size adult (fitting atomizer body piece)
2 x Air tubing, diameter approx 9 mm (inner diameter 6 mm), length approx 1 m
2 x Dosage cup
1 x Reusable mask, size pediatric
1 x Reusable mask, size adult
5 x Spare inlet filters
5 x Spare particle filters
1 x Set of spare fuses
Clear instructions for use / diagrams for assembly in English
List of accessories / parts.

Accessories/Spare parts/Consumable:
Flexible tubing, mouth pieces, masks, filters, fuses

36- ORS MEASURING JUG/CONTAINER:



Details:

Made of durable plastic material, lightweight

The measuring jug has a handle, convenient to use

Plastic Color: Clear

Capacity: 20ml/30ml/50ml/300ml/500ml/1000ml

Quantity: 20ml/30ml (2pcs), 50ml/300ml/500ml/1000ml(1pc) Package Contents: 1Pc

Measuring Jug with 6pc glasses.

37: Otoscope:



- Technical specification:
 - 2.7V vacuum lamp
 - Direct illumination, with an upgraded, reflection-minimized illumination
 - Removable magnifying lens with 2.5x magnification
 - Possibility to insert external instruments when magnifying lens is removed
 - Screw fitting for secure attachment to the handle
 - Sealed system for performing pneumatic otoscopy
 - Extremely impact resistant casing made of glass-fiber reinforced plastic
 - Simple bulb replacement at the base of the instrument head
 - Including ear specula 4mm and 2.5mm

38: Oxygen mask, kit:



Adult and Pediatric sizes 7 foot oxygen tubing Safety valve Non-sterile Single use Latex free. The elastic head strap and the adjustable nose clip helps to keep the mask in place and secure the correct fit. The transparent PVC mask enables clear visualization of the patient.

39-Pulse oximeter:



Auto power off:	yes
Pulse rate:	(PR) 30bpm~240bpm
Atmospheric pressure:	70kPa-106kPa
Operating humidity:	30%-80%
Oximeter Type:	Pulse Oximeter with Probe
Features:	With Alarm
Type:	Digital Finger Oximeter
Battery:	Two AAA 1.5V batteries

40- Oxygen regulator:



- Gas Flowmeter Oxygen Pressure Reducing Regulators Valve is made of metal.
- Standard production workshop, with gas cylinder pressure display, pressure relief valve and humidification bottle interface, safe and hygienic, durable.
- Designed with a metal core and a copper filter those can filter impurities and clean the gas for your peace of mind.
- Reasonable structure, with strong operation, strong versatility and strong interchangeability.
- The oxygen inhaler humidification bottle has a muffler to reduce noise.

41- Baby scale digital:



Capacity	20kg/5g
Units	kg/lb
Item material	ABS
Scale size	54.5*33*14.5cm
Power supply	4*AA batteries
Function	Auto power off / Tare, Low Power indication
Carton size	73*59*38cm/4pcs/20.5kg

42-Adulte scale:



- Material: Tempered Glass.
- Size: About 28 x 28 x 3cm.
- Made of high quality material, durable and safe to use.
- Automatic switch on/off, save battery power.
- Portable

- Model No: GPS 054

- Capacity : 150 Kg x 0.5 Kg.
- Size : 320 mm x 62 mm

43- SCALE, SALTER TYPE, 0-25 KG, GRAD. 100 G:



44-SPECULUM, VAGINAL, COLLIN, FOR VIRGIN, 90 X 16 MM:



45-SPECULUM, VAGINAL, COLLIN, STANDARD, 100 X 35 MM:



46-BP set, ADULT:

Stethoscope

3M Littmann® Classic II S.E. Stethoscope

Ideal stethoscope for medical students & doctors & other healthcare workers wanting a superior stethoscope

Littmann Classic II S.E. Stethoscope

High specification Littmann Stethoscope with patented tunable diaphragm design.

Low and high frequency sounds can be monitored by simple pressure on the chest piece.

Large diaphragm adult chestpiece.

Supplied boxed with accessories

Professional high quality 28 inch tubing, please note units are dispatched within 24hrs, please allow 3-4 days for standard UK Delivery. Express delivery option is available.

3 year warranty

Littmann Classic SEStethoscope with adult chest piece. To purchase Littmann Classic II S.E. stethoscope , add the number of Littmann Classic S.E. stethoscopes you require to the box, and click "add to basket



Sphygmomanometer

Key Specifications:

Calibrated Nylon cuff

Non-stop pin manometer

2-tube adult size bladder
Standard latex bulb
Nylon carrying case
Deluxe valve with spring
End valve with dust fliter
Dual head stethoscope
PC/BOX, 30PCS/CTN, 44X48X32. 5CM, 20KGS

Specification

Product Details Economical option Includes: Standard air release valve Inflation bulb Blue nylon calibrated cuff and zippered carrying case 5-year calibration warranty on gauge Cuff Size: 16.1" - 24.2"



47-stand lamp:



- Maximum of 50 Watt halogen bulb (50 Watt bright white halogen light bulb included).
- 115/120V AC. UL listed 3-wire plug with 8 ft.
- Grounded cord.

- Flexible 12" gooseneck arm maintains its positioning properly over time and adjusts 360 degrees.
- Weighted steel base has smooth rounded lip will not cut into wiring, rust, or mar floors.
- Heavy gauge anodized aluminum shade with flared, double-walled ventilated reflector.

48-Spinal board (Spica):



The table has two full spine support and two perineal posts that are interchangeable for child's size and doctor's preference. Also included are two partial spine supports with one removable perineal post. Fully adjustable arm supports are available as an option. The pediatric Spica table is available in both a matte and polished finish.

49- Standard emergency kit for Ambulance:



First Aid In An Emergency Booklet - Single 1

Ambulance medium first aid dressing, 12 x 12cm - sterile 4

Ambulance large first aid dressing, 18 x 18cm - sterile 1

Ambulance disposable triangular bandage, 90 x 90 x 130cm - non-sterile 2

Ambulance first aid finger dressing, 3.5 x 3.5cm - sterile 2

Ambulance conforming bandage, 7.5cm x 4.5m - single 1

Safety pins, assorted sizes - pack of 6 1

Ambulance no.16 eye pad first aid dressing - sterile 2

Wash proof Low Allergy Plasters Assorted (Pk 10) 4

Sterile Cleansing Wipes (pk 10) 2

Microporous tape, 2.25cm x 10m - single 1

SJS Nitrile Powder Free Gloves (large) 6

Disposable Heat Retaining Adult Blanket 1

Burnshield® Dressing- 10 x 10cm 1

Tuff Kut Scissors 1

50: Stair for delivery table (2 steps)



Type:aluminium platform step ladder

Version:fixed construction, 2 steps

Material:Aluminium Length (mm):710

Width (mm):610Height (mm):400Weight (kg) 5.5

51-Stretcher (folding)



Description

STRETCHER, CARRIER, with movable side rail.on wheels

Specifications

Materials:	Frame: 18/10 stainless steel.
	Mattress: leatherette
	Castors: rubber and steel, zinc-coated.
Specifications:	Overall size LWH: 1,940x600x850mm
	Useful size LWH: 1,800x520mm
	Frame: tubes, 30mm diameter.
	Movable side rails: right and left, quick one-handed locking und unlocking.
	Headrest, adjustable.
	Castors: swivel wheels, diameter 120mm (2 with foot brakes).
	Mattress: leatherette upholstery, easy to clean and X-ray transparent.
	Size: 1,200x25040mm
	Must be corrosion-resistant (suitable for tropical environments) and support repeated decontaminations (chlorine solution).

	Carrying capacity: approximately 150-180kg.
	Unit presentation: individually packaged, in knockdown construction, assembly instructions included.
Packaging:	The following information must appear on the packaging:
	- Designation of item, address of supplier (manufacturer), and CE mark and reference number of notifying body.
Other:	Supplied with clear instructions and diagrams for assembly in 3 languages (English, French and Spanish), a list of accessories and parts, and assembly-specific tools.

52-Suction machine (Pedal)



Product Description

Pedal Suction offered by us is primarily used in hospitals of all levels for suction of phlegm, blood and other thick liquid during surgical operations and induced abortions. Due to its compact size, lightweight and trouble-free operation and it particularly fits for being extensively used in rural clinics, no power area, homes, remote areas, and other emergency occasions.

Features: Longer functional life

- Compact design
- Can be operated without power
- Easy operations

53-Suction machine (electrical)



Features:

This device is portable because of its small volume.

This device is equipped with a imported membrane pump available with long service life.

This device has low noise and is maintenance-free.

This device is equipped with an overflow protection unit to prevent liquid from getting into pump body.

It's equipped with the hand-operated switch and footstep-operated switch.

This device can meet the requirements for suctioning pus, sputum and other thick liquids in surgical operations and in household healthcare, and may also be used in suctioning of other purposes.

Technical specifications:

Negative pressure value: 0.09Mpa

Air pumping efficiency: 20L/min

Pump structure: oil-free pump

Liquid vessel: 1000ml

Adjustment range of negative pressure: 0.013-0.09Mpa

Mains: AC 220V 10% 50Hz DC 12V

Input power: 150VA

Working mode: international: continuous operation

54-Delivery table:



General Description:

Bed, labour/delivery, with accessories.

Technical Specifications:

Bed, labour and delivery, in 2 sections.

Body section on supporting legs finished with rubber feet.

Leg section on swivel castors with brakes

Leg section can be completely recessed under the body section.

Both sections are fitted with thick padded mattress; the waterproof cover is removable with zipper.

Lithotomic leg-holders have sturdy fixation integrated with the table.

Height can be adjusted, also width via rotation in fixation.

Material:

Must be resistant to corrosion (ref. to tropical environment) and decontamination (ref. to chlorine solution)

Frame: Epoxy or enameled coated or chrome plated tubular steel.

Mattress-padding: Foam density approximately 21 - 25kg/m³.

Cover mattress-padding: Waterproof, washable, resistant to cleaning with chlorine based solution and flame retardant.

Dimensions:

Body section assembled: Approximately 1000x800x750mm (l x w x h).

Leg section assembled: Approximately 900mm (l).

Swivel castors: Approx. diameter 100mm.

Padding of mattress: Approximately 60-80mm (h)
Carrying capacity: Approximately 150-180kg.

Knockdown construction

Supplied with:

Clear instructions and diagrams for assembly

List of accessories and parts and specific tools for assembly

2 x leg holders with canvas straps OR 2 knee crutches, adjustable in height and width.

Instructions for use:

Basic hospital equipment for health structures: Labour or delivery bed for delivery or recovery room.

55- Examination table



Specifications

Obstetric Labor Examination Table :

Obstetric Labour Table (Mechanical)

- Size: 72" L x 27"W x 30"H
- Tubular frame work mounted on PVC stumps

- Stainless steel top in three sections
- Trendlenburg positions adjustable on screw mechanism by handle
- Backrest section adjustable on ratchet system
- Height adjustable by a pair of leg holders with straps
- Complete with self-locking traction handle at side, IV Rod & mattress

56- Thermometer for pharmacy stock (wall type)



Product description

100% brand new and high quality.

Wall hung thermometer for both indoor and outdoor.

Lightweight, with Celsius and Fahrenheit temperature readings.

Clear digit, easy to read.

With hanging hole, convenient to hang.

Suitable for hanging at your home, upstairs, downstairs, garage, greenhouse, office and garden.

Color: wood color

Material: wood, glass

Size: 15cm (5.9in) × 3.5cm (1.38in)

Measurement Range: -30~50°C/-20~120°F

Quantity: 1pc

Package includes:

1pc × Wall Thermometer

57-Digital thermometer:



Specification:

The Flexible Tip Digital Thermometer makes temperature-taking safer than ever. Not only is there no danger of broken glass or mercury poisoning, the flexible probe provides a comfortable fit that conforms to the mouth and stays in place.

Features clinical accuracy, a 60-second readout, peak temperature tone, memory recall, fever alarm and auto-shut off.

Includes a storage case, five probe covers, and a replaceable battery. Can be used orally, rectally or under the arm. Two-year limited warranty.

58-Thermometer - Hygrometer digital display (for main pharmacy stock)



Big LCD Display Indoor Humidity Meter Digital Thermometer Hygrometer


- Shows temperature
- Humidity
- clock

59- Tourniquet:



A tourniquet is a constricting or compressing device, specifically a bandage, used to control venous and arterial circulation to an extremity

60- Vision testing chart (E-Chart):

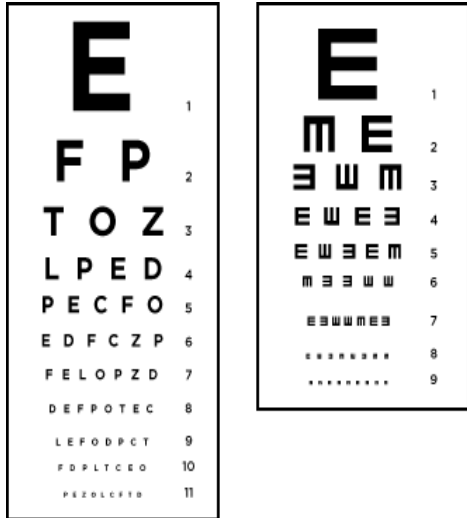

- The classic example of an eye chart is the Snellen eye chart
- Generally they show 11 rows of capital letters.
- The top row contains one letter (usually the "big E," but other letters can be used). The other rows contain letters that are progressively smaller.

61- Zero measuring cup:



- 12 oz. - 1.5 Cup Capacity
- Heavy Clear Plastic
- Standard & Metric Markings
- Easy to Clean
- Ideal for liquids and solids
- Zero Cup comes in two sizes:

- Small is recommended for users under 30 and who have never given birth vaginally. Large is recommended for users over 30 or who have given birth vaginally at any age.
- However, it is important to consider other factors such as cervix height, bladder sensitivity, and the heaviness of your flow in addition to your age and the strength of your pelvic floor muscles

62- CENTRIFUGE, ELECTRICAL, 8 TUBES:



Product description

Type:Low Speed Centrifuge

Max speed:4000r/min

Maximum centrifugal force:2150×g

Motor type:Brushless DC motor

Time range:0 - 99mins

Noise:≤55dB

Dimension:235mm x 240mm x 180mm

Weight:Approx 6.1kg

Centrifuge rotors: 10/15ml centrifuge tubes, compatible with blood collection tubes

Power supply :110V - 240V voltage universal

Speed accuracy:±20r/min

Feature:

1. Driven by brushless motor and free on maintenance.
2. Controlled by microcomputer with touch-in panel and LED display, easy to operate.
3. Electronic door lock, over speed protection

4. Arbitrarily setting the parameter of speed and time. Easy to use.
5. Visual balance, without balancing, automatic balance
6. Suitable to chemistry Laboratory and Clinical Laboratory in Hospital and health facilities.

63- Centrifuge handle



Product Description

handle centrifuge

Capacity	15ml*4
G.W.	3kg
N.W.	2.5kg

64- Hemoglobin meter (Salih)



Product parameters

Measurement sample: capillary whole blood

Sample size: 5uL

Test range: 4-13% (NGSP/DCCT unit)

Measurement time: 5 minutes (after adding samples)

Temperature compensation: built-in thermal sensor automatic compensation

Shutdown mode: automatically shut down after 15 minutes.

Test average CV value: less than 4%

Test methods: immunoassay, microelectronics, dry chemistry, optics